

Absolute.Za*

Absolute Rated Depth Cartridge Filter with Z.Plex* Filter Technology

Features and Benefits

Absolute.Za (Abs.Za) is manufactured using patented Z.Plex filter technology and is engineered specifically for absolute filtration. (See Figure 1.) The patented filter matrix of the Absolute.Za provides unmatched performance in these applications. The Absolute.Za filter composition incorporates small diameter fibers and an innovative 3-dimensional fiber matrix. The filter matrix maintains structural integrity while greatly increasing the filter's particle holding capacity and reducing pressure drop. This unique construction allows for absolute filtration and long life.

- Optimized performance for absolute filtration.
- Superior particle holding capacity
- Long filter life
- Low pressure drop
- Melt-bonded exterior ensures no media migration
- High strength polypropylene core

Typical Application

- Chemicals
- Oil and gas
- Pharmaceuticals
- Food and Beverage

Materials of Construction

100% polypropylene construction (filter, end caps and core)

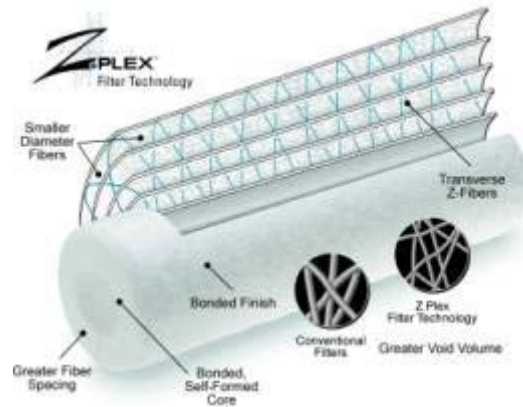


Figure 1: Patented Z.Plex Filter Technology
Patent Numbers: 6,916,395, 6,938,781, 6,986,427

Micron Ratings and Dimensions

- Micron ratings 0.5, 1.0, 3.0, and 5.0 micron
- Nominal O.D. 2.60"
- Nominal I.D. 1.10"

Additional Information

Absolute.Za cartridge filters are made from thermally bonded fibers of polypropylene. GE certifies that it uses no resin-binders, lubricants, anti-static or release agents or other additives in the manufacture of these cartridges, and that the resin used for manufacturing the filter media meets the food contact requirements of U.S. FDA 21CFR regulations.

GE filter cartridges are manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your GE representative for more information.



Find a contact near you by
visiting gewater.com or
e-mailing custhelp@ge.com.

Global Headquarters
Trevose, PA
+1-215-355-3300

Americas
Watertown, MA
+1-617-926-2500

Europe/Middle East/Africa
Heverlee, Belgium
+32-16-40-20-00

Asia/Pacific
Shanghai, China
+86 (0) 411-8366-6489

©2006, General Electric Company. All rights reserved.

*Trademark of General Electric Company; may be registered in one or more countries.


FS1027EN 0602

Performance Data

Type	Micron Rating	Removal Rating (um) at Various Efficiencies	
		90.0%	99.9%
Abs.Za	0.5	> 0.5	< 1
	1.0	> 0.5	1
	3.0	1.20	3
	5.0	1.80	5

NOTE: Removal efficiencies are reported for a given particle size. An efficiency of 99.9% at 3 microns means that the filter removes 99.9% of the particles that are 3 microns in size.

Flow Performance in Clean Water

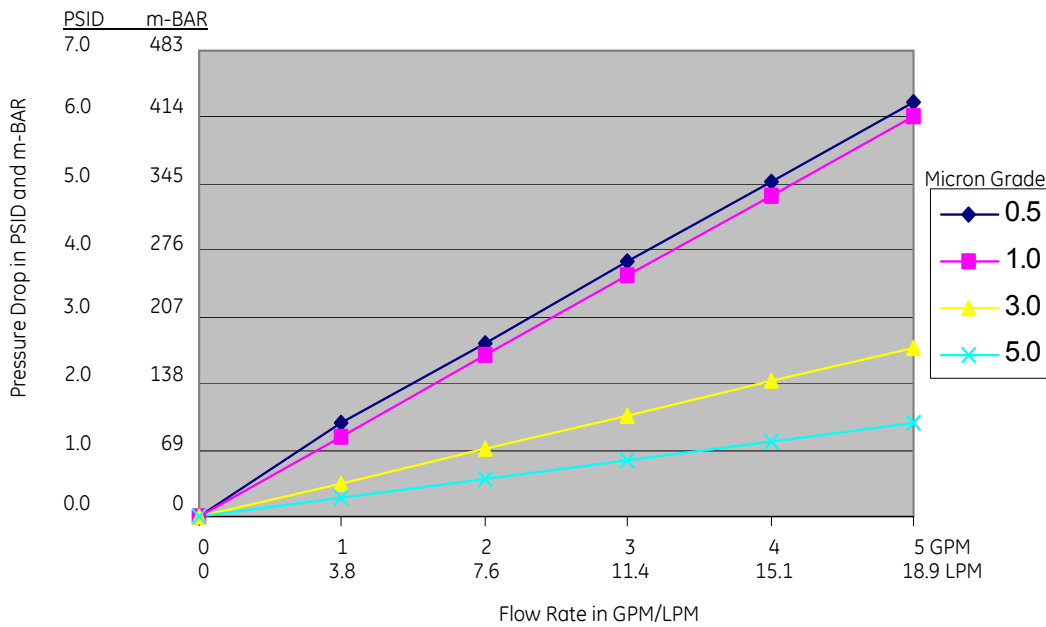

Ordering Information

If you are ordering Absolute.Za filters with standard ends and a silicone gasket, then your Product Order Number will look like this: **Abs.Za 01-40 AAS**. If you are ordering Absolute.Za with end adapters, select designations from all applicable columns. Your Product Order Number will look like this: **Abs.Za 01-40 EHE**.

Type	Micron Rating μm	Cartridge Length Inches (cm)	Cartridge Length with Gaskets (cm)	End 1 Adapter	End 2 Adapter	O-Rings & Gasket Material
Abs.Za I.D. = 1.10" O.D. = 2.60"	95 = 0.5	9½ (24.1)	10 (25.4)	A = Open end w/gasket E = 222 O-Ring F = 226 O-Ring	A = Open end w/gasket K = Self Seal Spring H = Fin S = Solid End	S = Silicone E = EPDM V = Viton ¹ B = Buna
	01 = 1.0	10 (25.4)	10.5 (26.7)			
	03 = 3.0	19½ (49.5)	20 (50.8)			
	05 = 5.0	20 (50.8)	20.5 (52.1)			
		29¾ (74.3)	29¾ (75.6)			
	30 (76.2)	30.5 (77.5)				
	40 (101.6)	40.5 (102.9)				

¹Viton is a trademark of DuPont Dow Elastomers.