

# SWRO.Zs Depth Cartridge Filters

## Z.Plex\* Technology Depth Filter for Seawater Reverse Osmosis Pre-Filtration

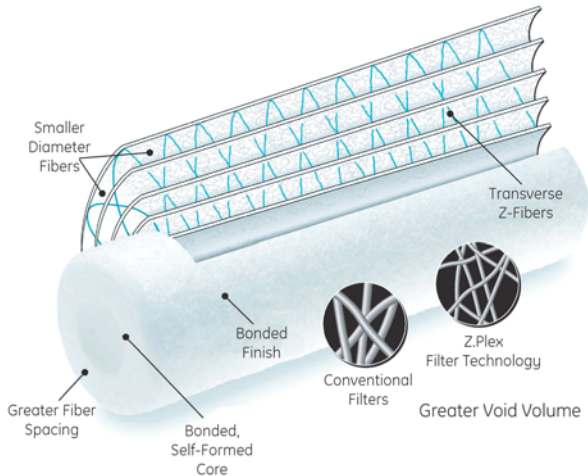


Figure 1: Z.Plex Filter Technology

### Description and Use

SWRO.Z is manufactured using patented Z.Plex filter technology (Figure 1) and is engineered for seawater RO pre-filtration. SWRO.Zs' proprietary filter matrix provides unmatched performance in these applications.

- Up to twice the life of conventional depth filters
- Up to 50% lower pressure drop
- Up to 100% greater dirt holding capacity
- Superior SDI reduction
- Melt-bonded exterior and core ensures no media migration
- Provides lower total cost of filtration operations
- Application in wide variety of feed waters
- FDA compliant

### Typical Applications

- Seawater RO pre-filtration

### General Properties


#### Materials of Construction

SWRO.Zs filters are made of 100% polypropylene construction. Tables 1 and 2 provide information on dimensions and flow performance.

Table 1: Dimensions

Nominal Outside Diameter	Nominal Inside Diameter
2.50" (6.4 cm)	1" (2.5 cm)

Table 2: SWRO.Zs 1 and 5 micron vs. Conventional 5 micron Flow Performance in Clean Water<sup>1</sup>

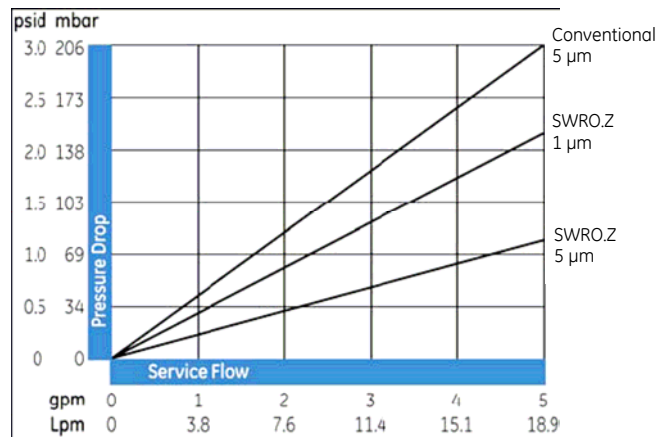

<sup>1</sup> Data based on 10" length filter

### Micron Ratings, Lengths and End Adapters

- Micron ratings: 1 and 5 micron
- Standard lengths fit most housings - custom lengths are also available
- Wide range of end adapters including self-sealing spring, 222 and 226 O-rings, and extended cores.



Find a contact near you by visiting [www.ge.com/water](http://www.ge.com/water) and clicking on "Contact Us".  
 \* Trademark of General Electric Company; may be registered in one or more countries.

©2009, General Electric Company. All rights reserved.

## Additional Information

SWRO.Z cartridge filters are made from thermally-bonded fibers of polypropylene. GE Water & Process Technologies certifies that it uses no resin binders, lubricants, antistatic or release agents or other additives in the manufacture of these cartridges, and that the resin used for manufacturing the filter media meets the food contact requirements of U.S. FDA 21CFR regulations. When required, specify only FDA compliant sealing materials and end-adapters.

GE filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users

should carefully verify chemical compatibility. Please contact your GE representative for more information.

Table 3 shows ordering information. If you are ordering SWRO.Z filters with standard ends (with no adapter on either end), select one designation from each of the first three columns. Your Product Order Number will look like this: SWRO.Zs 05-40. If you are ordering SWRO.Zs with end adapters, select designations from all applicable columns. Your Product Order Number will look like this: SWRO.Zs 05-40 XK.

**Table 3: Ordering Information**

Type	Micron Rating, mm	Cartridge Length inches (cm)	End #1 Adapter	End #2 Adapter	Material
SWRO.Zs  I.D. = 1.0 O.D. = 2.5	01 = 1	40 (101.5)	L = Extended Core	K = Self-seal spring	O-Rings
	05 = 5	50 (127.0)	E = 222 O-Ring	H = Fin	S = Silicone
		60 (152.4)	F = 226 O-Ring	S = Solid End	E = EPDM
		70 (177.8)	X = Standard SWRO.Zs plain end (non-gasket)	X = Standard SWRO.Zs (no gasket)	V = Viton <sup>2</sup>
		Y = Flat Gasket	Y = Flat Gasket	B = Buna P = Santoprene (flat gasket only)	

<sup>2</sup>Viton is a registered trademark of DuPont.

