

DK series

industrial high rejection nanofiltration elements

The D-Series family of proprietary thin-film nanofiltration membrane elements is characterized by an approximate molecular weight cut-off of 150-300 Dalton for uncharged organic molecules. Divalent and multivalent anions are preferentially rejected by the membrane while monovalent ion rejection is dependent upon feed concentration and composition. Since monovalent ions pass through the membrane, they do not contribute to the osmotic pressure, thus enabling D-Series nanofiltration membrane systems to operate at feed pressures below those of RO systems.

Among other applications DK High Rejection NF Elements are used for dye removal/concentration, sodium chloride diafiltration and metals recovery.

Table 1: Element Specification

Membrane	D-Series, Thin-film membrane (TFM*)
----------	-------------------------------------

Model	Average permeate flow gpd (m ³ /day) (1,2)	Minimum MgSO ₄ rejection (1,2)
DK2540C30	560 (2.1)	98%
DK2540C50	350 (2.3)	98%
DK2540F30	540 (2.0)	98%
DK2540F50	340 (1.3)	98%
DK4040C30	1,900 (7.2)	98%
DK4040C50	1,400 (5.3)	98%
DK4040F30	1,900 (7.2)	98%
DK4040F50	1,400 (5.3)	98%
DK8040C30	8,100 (30.7)	98%
DK8040C50	6,500 (24.6)	98%
DK8040F30	8,100 (30.7)	98%
DK8040F50	6,500 (24.6)	98%

(1) Average salt rejection after 24 hours operation. Individual flow rate may vary ±25%


(2) Testing conditions: 2,000ppm MgSO₄ solution at 110psi (760 kPa) operating pressure, 77 °F (25°C), 15 % recovery.

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

* Trademark of SUEZ; may be registered in one or more countries.

©2018 SUEZ. All rights reserved.

Model	Spacer mil (mm)	Active area ft ² (m ²)	Outer wrap	Part number
DK2540C30	30 (0.76)	24 (2.2)	Cage	1206918
DK2540C50	50 (1.27)	18 (1.6)	Cage	1206919
DK2540F30	30 (0.76)	28 (2.6)	Fiberglass	1206925
DK2540F50	50 (1.27)	22 (2.0)	Fiberglass	1206926
DK4040C30	30 (0.76)	89 (8.2)	Cage	1206947
DK4040C50	50 (1.27)	67 (6.2)	Cage	1206946
DK4040F30	30 (0.76)	85 (7.9)	Fiberglass	3050075
DK4040F50	50 (1.27)	65 (6.1)	Fiberglass	3050073
DK8040C30	30 (0.76)	374 (34.7)	Cage	1206978
DK8040C50	50 (1.27)	300 (27.9)	Cage	1206979
DK8040F30	30 (0.76)	364 (33.8)	Fiberglass	1206993
DK8040F50	50 (1.27)	284 (26.4)	Fiberglass	1206994

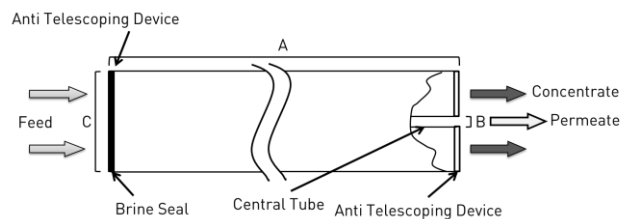

Note: **4040C** elements do not feature brine seal.

Figure 1: Element Dimensions Diagram - Female

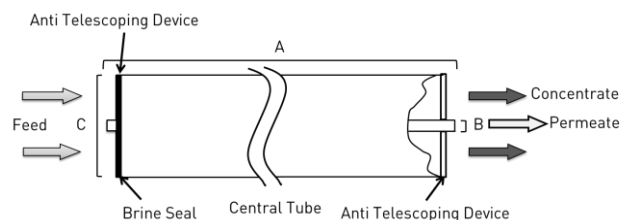


Figure 2: Element Dimensions Diagram - Male

Table 2: Dimensions and Weight

Model	Fig.	Dimensions, inches (cm)			Boxed
		A	B	C	Weight lbs (kg)
DK2540C**	2	40.0 (101.6)	0.75 (1.90)	2.4 (6.1)	4 (1.8)
DK2540F**	2	40.0 (101.6)	0.75 (1.90)	2.4 (6.1)	4 (1.8)
DK4040C**	1	40.0 (101.6) (1)	0.625 (1.59)	3.9 (9.9)	11 (5)
DK4040F**	2	40.0 (101.6)	0.75 (1.90)	3.9 (9.9)	11 (5)
DK8040C**	1	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
DK8040F**	1	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)

(1) Includes interconnector, refer to Technical Bulletin TB1206.

Table 3: Operating and CIP parameters

Typical Operating Flux	5 - 20 GFD (8 - 34 LMH)
Maximum Operating Pressure	600psi (4,137kPa) if T<95°F (35°C) 435psi (3,000kPa) if T>95°F (35°C)
Maximum Temperature	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
pH Range	Continuous operation: 3 - 9 Clean-In-Place (CIP): 2 - 11 (1)
Maximum Pressure Drop	Over an element: 15psi (103 kPa) Per housing: 60psi (414kPa)
Chlorine Tolerance	500 ppm hours, dechlorination recommended
Feedwater	NTU < 1 SDI ₁₅ < 5

(1) Refer to Cleaning Guidelines Technical Bulletin TB1194.