

LifeASSURE™ BDA020 Series

Sterilizing Grade Filter

0.2 µm rated filters for bottled water & beverage microbiological stability

The LifeASSURE™ BDA020 series filter helps bottled water and other beverage processors meet the highest standards for microorganism control. Combined with 3M Purification Inc.'s range of particle control and prefiltration filter cartridges, LifeASSURE BDA020 series filters offer bottlers a complete solution for rigorous contaminant control while maintaining long service life and low operating costs.

Durable Design

The LifeASSURE BDA020 series filter membrane and cartridge design innovations result in a highly durable filter cartridge, capable of secure operation through numerous cycles of hot water sanitation, steam sterilization, and chemical based cleaning and sanitation.

ADVANCED TECHNOLOGIES

Highly Asymmetric BDA020 Membrane

LifeASSURE BDA020 series filters incorporate a novel dual-layer membrane with a high degree of asymmetry (Figure 1. on the next page). When viewed in cross-section, the membrane contains larger pores on the upstream surface that gradually taper to smaller pores towards the down stream surface. Compared to conventional membranes with a symmetric pore structure, this structure provides greater contaminant capacity, since it presents greater open spaces (void volume) in which to retain these contaminants. This increase in capacity leads directly to longer service life. In addition, the asymmetric structure provides less resistance to flow, resulting in a lower pressure drop when compared at a constant flow rate to competitive filters, allowing a user to employ fewer LifeASSURE BDA020 series filters for any given flow rate.

Features & Benefits

Validated 0.2 µm absolute rated membrane

- Reliable sterilizing filtration

Asymmetric dual-layer polyether sulfone membrane

- Exceptionally high capacity and service life to help maximize economy

Advanced Pleat Technology Construction

- Allows superior fluid and contaminant access to filter surface area for greatest service life and flow rates

CFR 21 Listed Materials of Construction, filter cartridges are compliant with Regulation (EC) 1935/2004, USP Biological Reactivity for Plastics Test—Class VI, Technical Support Guide

- Eases regulatory concerns



Applications

LifeASSURE™ BDA020 Series filters are optimized for Food & Beverage applications requiring sterilizing 0.2 micron retention rated performance.

- Bottled Water
- Soft Drinks
- Process Water
- Intermediates & Ingredients
- Syrups
- Dyes & Flavors



Advanced Pleat Technology Design

LifeASSURE™ BDA020 series filters feature Advanced Pleat Technology (APT) design for extended service life. This design technology helps to maximize the useful surface area of the filter while maintaining open flow paths between the media pleats (refer to Figure 2.). By employing the APT design, the LifeASSURE BDA020 series filter provides lower pressure drops, longer service life, and lower overall operational costs.

Novel Media Support Design

LifeASSURE BDA020 series filters cartridge employ a design that results in higher beverage flow versus pressure drop compared to competitive filters. This 3M Purification development combines the high flowing LifeASSURE BDA020 series filter membrane with special support layers upstream and downstream of the membrane. When combined with the previously mentioned APT, this feature greatly increases flow per cartridge, and results in lower overall operational costs.

ADVANCED PERFORMANCE

Extended Service Life

In the majority of beverage applications, the final membrane filter is used in a continuous (as opposed to a batch) operation. Its service life is measured either by the volume filtered, or the number of days in service, before becoming permanently blocked. Filters that provide longer service life not only reduce direct operational costs, but also reduce indirect filter costs as well (filter change-out/installation labor, downtime between change-outs, filter flushing, etc.). The LifeASSURE BDA020 series filter cartridge's unique combination of highly asymmetric membrane, APT design, and novel upstream & downstream supports all work together to help maximize the volume of beverage that can be processed.

Absolute Microbiological Control

The primary purpose of a membrane filter cartridge in bottled water and beverage processing is to effectively control even the smallest microorganisms. LifeASSURE series filters provide superior retention of common spoilage microorganisms, even at challenge concentrations that far exceed those experienced by most beverage producers. The LifeASSURE BDA020 series cartridge membrane has been validated for complete retention of *Brevundimonas diminuta* (*B. diminuta*) (ATCC 19146) at a concentration of 10^7 CFU/cm² or greater.

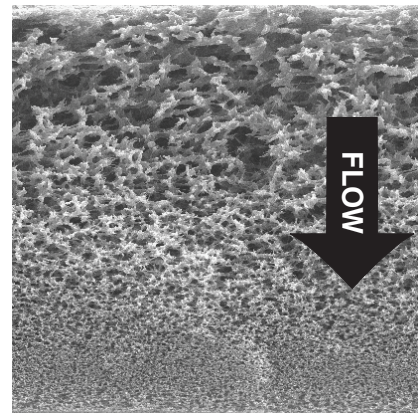


Figure 1. SEM Photograph Showing LifeASSURE™ BDA020 Series Filter Membrane Cross-Section

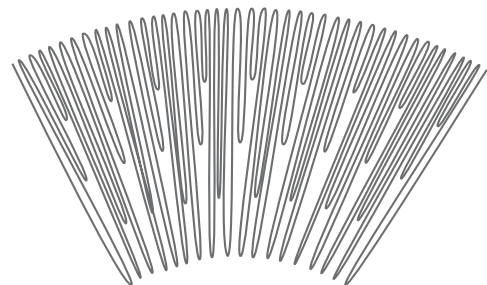


Figure 2. - Advanced Pleat Technology

LifeASSURE™ BDA020 Series Filters	Microorganism	Retention Level
BDA020	<i>B. diminuta</i>	Complete
BDA020	<i>Pseudomonas aeruginosa</i> (<i>Ps. aeruginosa</i>)	Complete

Fast Flow Rates at Low Pressure Drops

3M Purification has combined three key technological advances to provide a fast flow rate per unit of pressure drop. These three technologies, APT design, a novel upstream and downstream support design, and a highly asymmetric microporous membrane, afford users with faster process flow rates using fewer filters as compared to alternative filters. When installed in an existing system with a fixed flow rate, LifeASSURE BDA020 series filters exhibit a lower pressure drop compared to alternative filters. Since filter change-out is usually tied to a terminal differential pressure drop (typically between 20 and 35 psid), employing filters that exhibit a lower initial pressure drop can result in longer filter service life. Alternatively, in a system when determining the number of filters needed to provide a desired flow rate at a given pressure drop, faster flowing filters will result in smaller, more economical systems.

Prefiltration Selections

Many bottling applications employ a prefilter and final filter in series to achieve maximum performance and economy. Prefilters are used to protect and extend the life of more expensive final filters. 3M Purification offers a number of premium prefilter choices: Betafine™ XL series pleated filter cartridges, Betapure™ NT-T series depth filter cartridges and LifeASSURE™ BLA series membrane filter cartridges.

LifeASSURE™ BDA020 Series Sterilizing Grade Filter

Betafine XL series cartridges (Literature 70-0201-8686-5) feature 3M Purification's APT design maximizing the accessible filter area and supplying exceptionally high flow rates. Those preferring depth-style filters can select from 3M Purification's Betapure NT-T series prefilter family (Literature 70-0201-8720-2) which employs an advanced media design that enhances flow while extending service life. For additional bioburden control, 3M Purification's LifeASSURE BLA series filter cartridges (Literature 70-0201-8712-9), featuring dual-zone membrane, are designed to deliver the ultimate in final membrane protection and bioburden reduction.

3M Purification Filter Housings

A specialized range of filter housings is available to meet the needs of the food & beverage industry. They provide easy access for filter change-out and afford a secure seal between filter and housing to help prevent fluid bypass.

All housings are constructed using 316L stainless steel to maximize corrosion resistance. Internal surfaces of the housings are polished to 20 micro-inch Ra to limit microbial adhesion and provide easy cleaning. 3M Purification also offers custom-design, fully automated filtration skids and mobile units. These units can incorporate membrane housings, prefilter housings, SIP and CIP systems along with all necessary piping, valves, monitoring devices and computer controls for reliable, hands-free operation.




Custom designed, fully automated filtration skids and mobile units are available.

Operating Parameters & Specifications

Materials of Construction	
Membrane	Dual layer polyether sulfone
Media Support Layers	Polypropylene
Inner Core, Outer Cage, End Cap Adapters	Polypropylene
Gasket & O-ring Options	Various polymers available
Encapsulated Adapter Reinforcing Ring	Polysulfone
Operating Conditions	
Typical Water Flow Rate at 25 °C	2 gpm/psid (11 lpm/100 mbar)
Maximum Forward Pressure Differential	80 psid @ 77 °F (5.5 bar @ 25 °C) 25 psid @ 176 °F (1.7 bar @ 80 °C)
Maximum Reverse Pressure Differential	10 psid @ 77 °F (0.689 bar @ 25 °C)
Maximum Forward Flow Diffusion at 25 °C per 10" filter	33 cc/min @ 40 psig (2.76 bar)
Maximum Hot Water Sanitation Temperature	85 °C
Maximum Steam Temperature	126 °C
Maximum Peracetic Acid Exposure	1% (10,000 ppm)
Cartridge Dimensions	
Filtration Surface Area	7.2 ft ² (0.67 m ²)
Outer Diameter	2.75" (70 mm)
Nominal Length	10" (254 mm), 20" (508 mm), 30" (762 mm), 40" (1016 mm)

LifeASSURE™ BDA020 Series Filter Ordering Guide

Cartridge Code	Configuration Code	Nominal Length Code	End Modification Code	Gasket/O-ring Material Code
BDA020	F	01 10" 02 20" 03 30" 04 40"	B — 226 O-ring & Spear, Code 7 C — 222 O-ring & Spear, Code 8 F — 222 O-ring & Flat Cap, Code 3 J — 226 O-ring & Flat Cap	A — Silicone B — Fluorocarbon C — EPR D — Nitrile

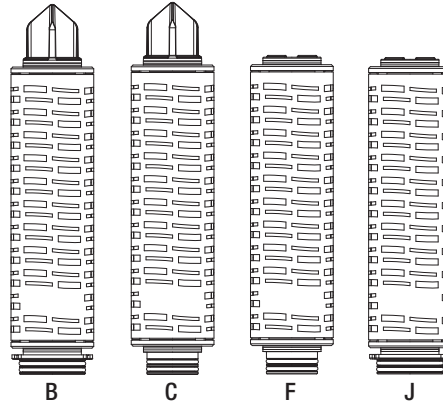

LifeASSURE™ BDA020 Series Filter Disc Ordering Guide

Part Number	Size	Quantity	Packaging
NM04708BDA020	47 mm	40	Box



NM04708BDA020

IBWA
 INTERNATIONAL
 BOTTLED WATER
 ASSOCIATION
 An IBWA Bottler
 (Supplier) Member

Product Use:

Many factors beyond 3M Purification Inc.'s (3M's) control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer:

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. **3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.**

If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability:

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

Your Local Distributor:



3M Purification Inc.
 400 Research Parkway
 Meriden, CT 06450
 U.S.A.
 Phone (800) 243-6894
 (203) 237-5541
 Fax (203) 630-4530
 www.3Mpurification.com

Please recycle. Printed in U.S.A.
 3M, LifeASSURE, Betapure, and Betafine
 are trademarks of 3M Company.
 All other trademarks are the property of
 their respective owners.
 © 2014 3M Company. All rights reserved.
 70020211994 REV 0814b