

# MUNI RO LE series

## membrane elements for municipal drinking water plants


Engineered to treat municipal potable water at lower pressures, the MUNI RO LE series enables drinking water processes to achieve reduced operating costs. Low-pressure operations also reduce membrane compaction, which increases the efficiency of the RO system.

### description and use

The MUNI RO LE series offers the unique solution oriented option of a 400sq. ft. Full-Fit\* membrane element. The creative Full-Fit design forms a close fit within the pressure vessel walls, thus eliminating dead spaces prone to bacterial growth and adhesion, and allowing for quick and complete cleaning. In addition to this sanitizing feature, pressure drop across the elements using Full-Fit design is significantly less than standard FRP construction (Figure 1), which may lead to substantial energy savings.

The MUNI RO LE membrane elements are tested and certified by NSF international against NSF/ANSI Standard 61 for material requirements only.

The MUNI RO LE membrane is a low energy element following a 100% Wet Test Quality Assurance.

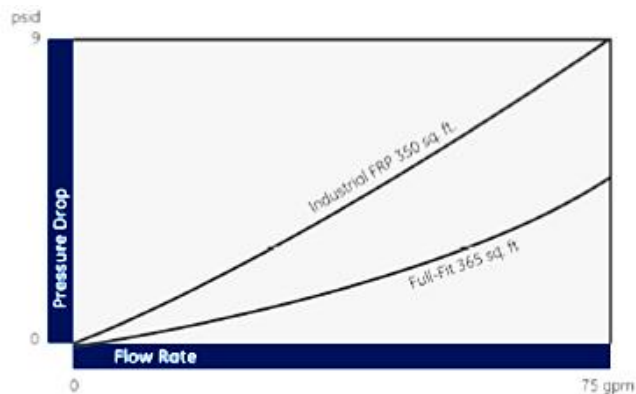

**Figure 1: High Flow Rate at Low Pressure Drop**


**Table 1: Element Specification**

Membrane	Thin-Film Membrane (TFM*)		
Model	Average permeate flow gpd (m <sup>3</sup> /day) (1,2)	Average NaCl rejection (1,2)	Minimum NaCl rejection (1,2)
MUNI-RO-400-LE-FF-WT	11,000 (41.6)	98.5 %	98.0%

(1) Average salt rejection after 24 hours of operation. Individual flow rate may vary ±20%.

(2) Testing conditions: 500ppm NaCl solution at 115psi (792.9kPa) operating pressure, 77°F (25°C), pH 7.5 and 15% recovery.

Model	Active area ft <sup>2</sup> (m <sup>2</sup> )	Outer wrap	Part number
MUNI-RO-400-LE-FF-WT	400 (37.2)	Full-Fit	3044144

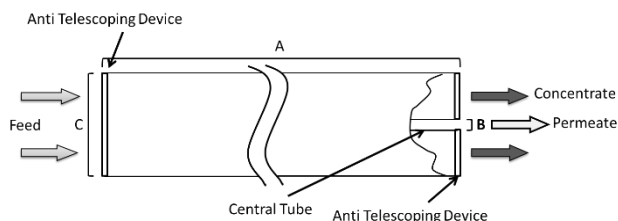

**Figure 2: Element Dimensions Diagram - Female**

**Table 2: Dimensions and Weight**

Model	Type	Dimensions, inches (cm)			Boxed Weight lbs. (kg)
		A	B	C	
MUNI-RO-400-LE	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)

Find a contact near you by visiting [www.suezwatertechnologies.com](http://www.suezwatertechnologies.com) and clicking on "Contact Us."

\*Trademark of SUEZ; may be registered in one or more countries.

©2018 SUEZ. All rights reserved.

**Table 3: Operating and CIP parameters**

<b>Typical Operating Pressure</b>	110psi (758kPa)
<b>Typical Operating Flux</b>	10-20GFD (15-35LMH)
<b>Maximum Operating Pressure</b>	400psi (2,758kPa)
<b>Maximum Temperature</b>	Continuous operation: 112°F (50°C) Clean-In-Place (CIP): 112°F (50°C)
<b>Minimum Crossflow</b>	30gpm (6.8m <sup>3</sup> /h)
<b>pH Range</b>	Continuous operation: 2.0-11.0, Clean-In-Place (CIP): 1.0-13.0 (1)
<b>Maximum Pressure Drop</b>	Over an element: 12psi (83kPa) Per housing: 50psi (345kPa)
<b>Chlorine Tolerance</b>	1,000+ ppm-hours, dechlorination recommended,
<b>Feedwater<sup>2</sup></b>	NTU < 1 SDI <sub>15</sub> < 5
<b>Recommended single element recovery</b>	< 15 %

(1) Refer to Cleaning Guidelines Technical Bulletin TB1194.