

MUNI RO HR series

reverse osmosis high rejection membrane elements for municipal drinking water plants

Engineered to treat municipal potable water with high total dissolved solids, the MUNI RO HR series enables drinking water processes to achieve an enhanced salt rejection.

MUNI RO HR series membrane elements are the solution for purification of drinking water that provides the benefits of both high rejection and high flux.

MUNI RO HR elements feature an FRP outer wrap and female end connections and are tested and certified by NSF international against NSF/ANSI Standard 61 for material requirements only.

Table 1: Element Specification

Membrane	Thin-film membrane (TFM*)
-----------------	---------------------------

Model	Average permeate flow gpd (m ³ /day) (1,2)	Average NaCl rejection (1,2)	Minimum NaCl rejection (1,2)
MUNI-RO-400-HR	11,000 (41.6)	99.8	99.3
MUNI-RO-430-HR	12,000 (45.4)	99.8	99.3

(1) Average salt rejection after 24 hours of operation. Individual flow rate may vary ±20%.

(2) Testing conditions: 2,000ppm NaCl solution at 225psi (1,550kPa) operating pressure, 77°F (25°C), pH7 and 15% recovery.

Model	Active area ft ² (m ²)	Outer wrap	Part number
MUNI-RO-400-HR	400 (37.2)	Fiberglass	3051521
MUNI-RO-430-HR	440 (40.9)	Fiberglass	3051522

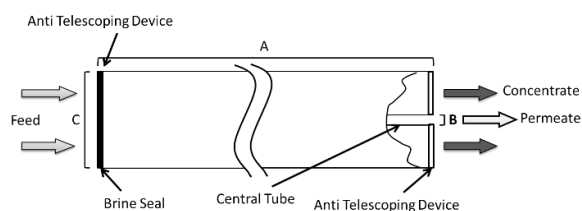


Figure 1 : Element Dimensions Diagram

Table 2: Dimensions and Weight

Model	Fig.	Dimensions, inches (cm)			Boxed Weight lbs (kg)
		A	B	C	
MUNI-RO-***-HR	1	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)

Table 3: Operating and CIP parameters

Typical Operating Pressure	200psi (1,379kPa)
Typical Operating Flux	10-20GFD (15-35 LMH)
Maximum Operating Pressure	600psi (4,137kPa)
Maximum Temperature	Continuous operation: 122°F (50°C), Clean In Place (CIP): 122°F (50°C)
Minimum Crossflow	30gpm (6.8m ³ /hr)
pH Range	Continuous operation: 2.0 – 11.0 Clean In Place (CIP): 1.0 - 13.0 (1)
Maximum Pressure Drop	Over an element: 12psi (83kPa) Per housing: 50psi (345kPa)
Chlorine Tolerance	1,000+ ppm-hours, dechlorination recommended,
Feedwater	NTU < 1 SDI ₁₅ < 5
Recommended single element recovery	< 15 %

(1) Please refer to Cleaning Guidelines Technical Bulletin TB1194.

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2018 SUEZ. All rights reserved.