



"A leading worldwide supplier of high efficiency filters for a variety of industries and applications."

NINE QUESTIONS TO DETERMINE THE CORRECT FILTER HOUSING

Questions:

1. Maximum Pressure
2. Maximum Temperature
3. Chemical & Physical Composition of the Stream
4. Type of Filtration Required: Particulate, Coalescing, Bypass, Fast Loop, Liquid-Liquid, Vacuum Inlet or Exhaust
5. Contaminant To Be Removed
6. Maximum Flow Rate
7. Line Size And Port Type
8. Level of Filtration Required
9. Relative Importance of Cost, Response Time, Ease of Service, and Interval

= YOUR FILTER SOLUTION

Our wide range of filter housing and element combinations enable us to supply the most suitable product for your application and specifications.

To select the correct filter housing the following information about the application is required

1. Maximum pressure



Low Pressure Rating

Low Temperature Rating



High Pressure Rating

High Temperature Rating

2. Maximum temperature

NINE QUESTIONS TO DETERMINE THE CORRECT FILTER HOUSING

3. Chemical & physical composition of the stream



Aluminum



Nylon



Stainless Steel

Items 1, 2, and 3 will determine the materials of construction of the filter housing, including the element and gaskets. Filter housings are available in a wide variety of standard and exotic materials to ensure there is a product for even the most demanding applications.

4. Type of filtration required: Particulate, coalescing, bypass, fast loop, liquid-liquid, vacuum inlet or exhaust



Item 4 will determine the configuration of the housing, one port for inlet filters, two ports for in-line housings and three ports for coalescing, bypass or fast loop housings. Liquid-liquid housings may have variable designs based upon #9. Vacuum inlet filters generally have two ports, whereas, exhaust units have three for coalescing.

5. Contaminant to be removed



Oil



Dirt



Water




Chemicals

6. Maximum flow rate




NINE QUESTIONS TO DETERMINE THE CORRECT FILTER HOUSING

7. Line size and port type

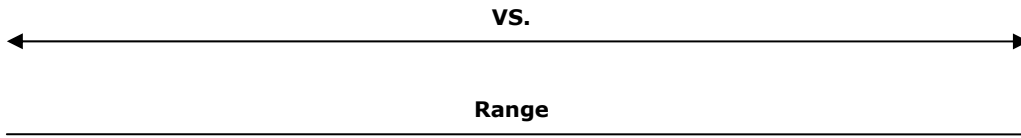

8. Level of filtration required



9. Relative importance of cost, response time, ease of service and interval



Cost



Ease of Service



Quick Service Time

Items 5, 6, 7, 8 and 9 will establish the most appropriate size of filter. This is generally a compromise between those factors favoring a small filter (fast response time, smallest space requirement, lowest cost) and those factors favoring a large filter (long service intervals, low pressure drop).

The exact choice will therefore depend on the relative importance of these factors in each particular application.